




# Grain Handler

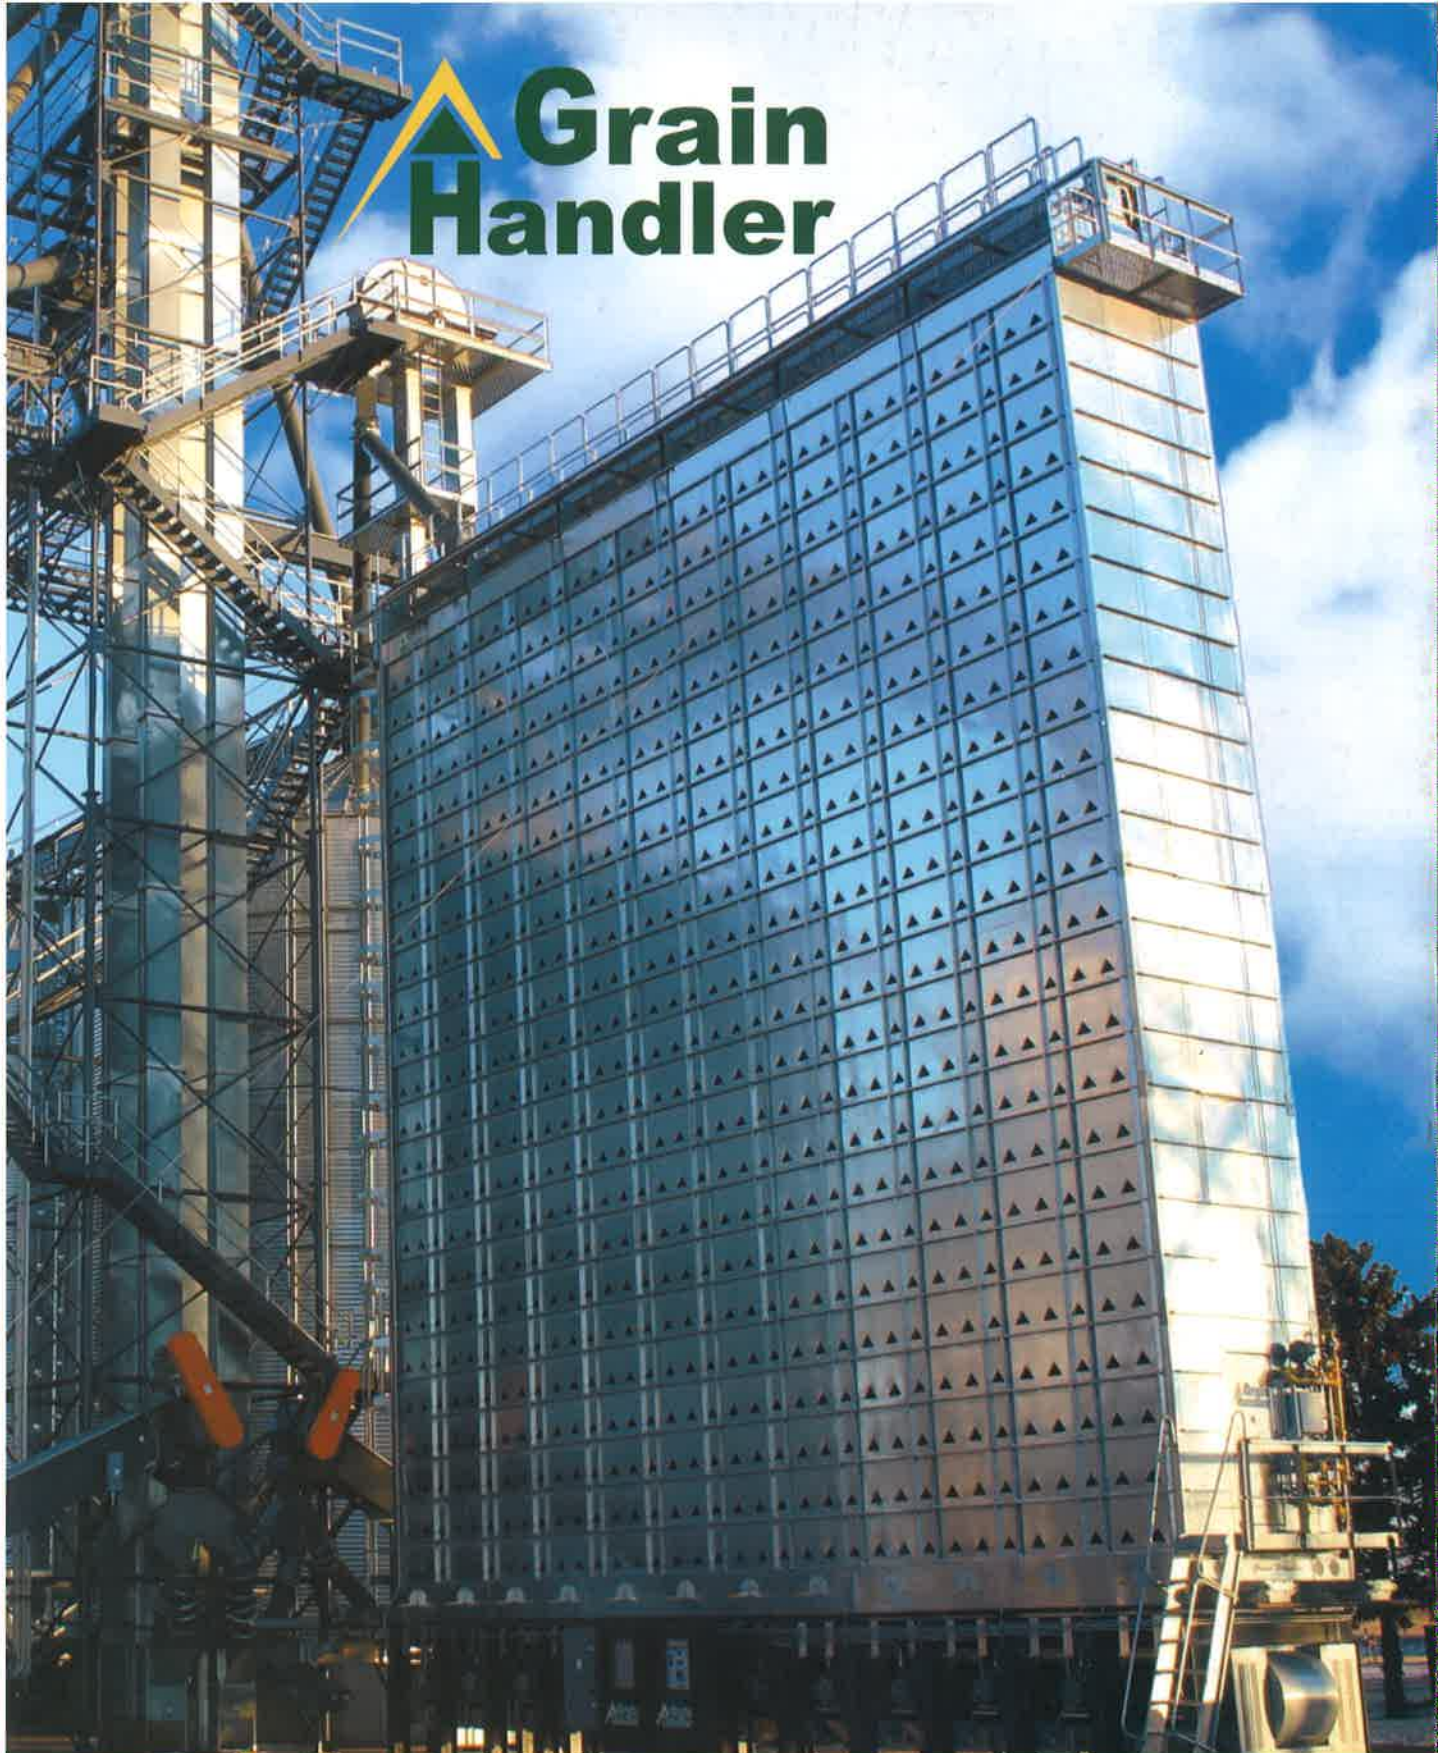

## Continuous Mixed Flow Dryers Fan Under Series

Comptoir Agricole Ste-Anne  
Tel: 450-582-0957  
1-888-891-0957  
Fax: 450-585-8957  
[www.comptoiragricole.com](http://www.comptoiragricole.com)



[www.grainhandler.com](http://www.grainhandler.com)

# EXPANDABILITY

## Fan Under Continuous Mixed Flow Dryers



- Grain Handler has produced the only single phase drying system in the industry with up to 5000 bph drying capacity.
- Lower energy costs and higher retention time in the dryer results in a higher quality and test weight grain.
- Mixed Flow design is capable of drying all types of grains at equal rates.
- Larger holding capacity allows grains to be tempered or heated over a longer period of time, resulting in less stress cracks.
- 40-45 cfm of air per bushel compared to 80-100 cfm of air per bushel on cross flow screen dryers, resulting in less fuel consumption.
- Food grade quality drying of any grain commodity.
- 400-7400 bph drying capacity.
- All models are engineered to be easily expanded.
- All models are designed with an enclosed top, which eliminates moisture problems associated with rain and snow exposure.
- Fuel source options available: Natural Gas, LP, LNG, and Butane
- Low maintenance, no screens to clean.
- 5 year limited warranty on all models.

### **SIMPLE YET ADVANCED: SINGLE BURNER AND SINGLE GAS TRAIN**


Maxon burner and internal vaporizer are included on all models. All models include a double block and bleed gas train that is designed to operate under low gas pressure with maximum safety in mind.



# EFFICIENCY

## Standard Options

1. Service Catwalk
2. Upper Service Platform
3. Ladder and Safety Cage
4. Heavy Construction for Future Expansion
5. Preheat Garner
6. Enclosed Roof
7. Takeaway Drag Conveyors
8. Full 6 foot Burner Service Door (both sides)
9. Burner Service Platforms (both sides)
10. Stairways to Burner Service Platforms
11. Advanced Single Gas Train
12. Corner "Half Ducts" for Even Air Flow
13. Tub Clean Out Door Handles for Easy Year-end Clean-out
14. Low Speed, Forward Curve Centrifugal Fans for Quiet Operation

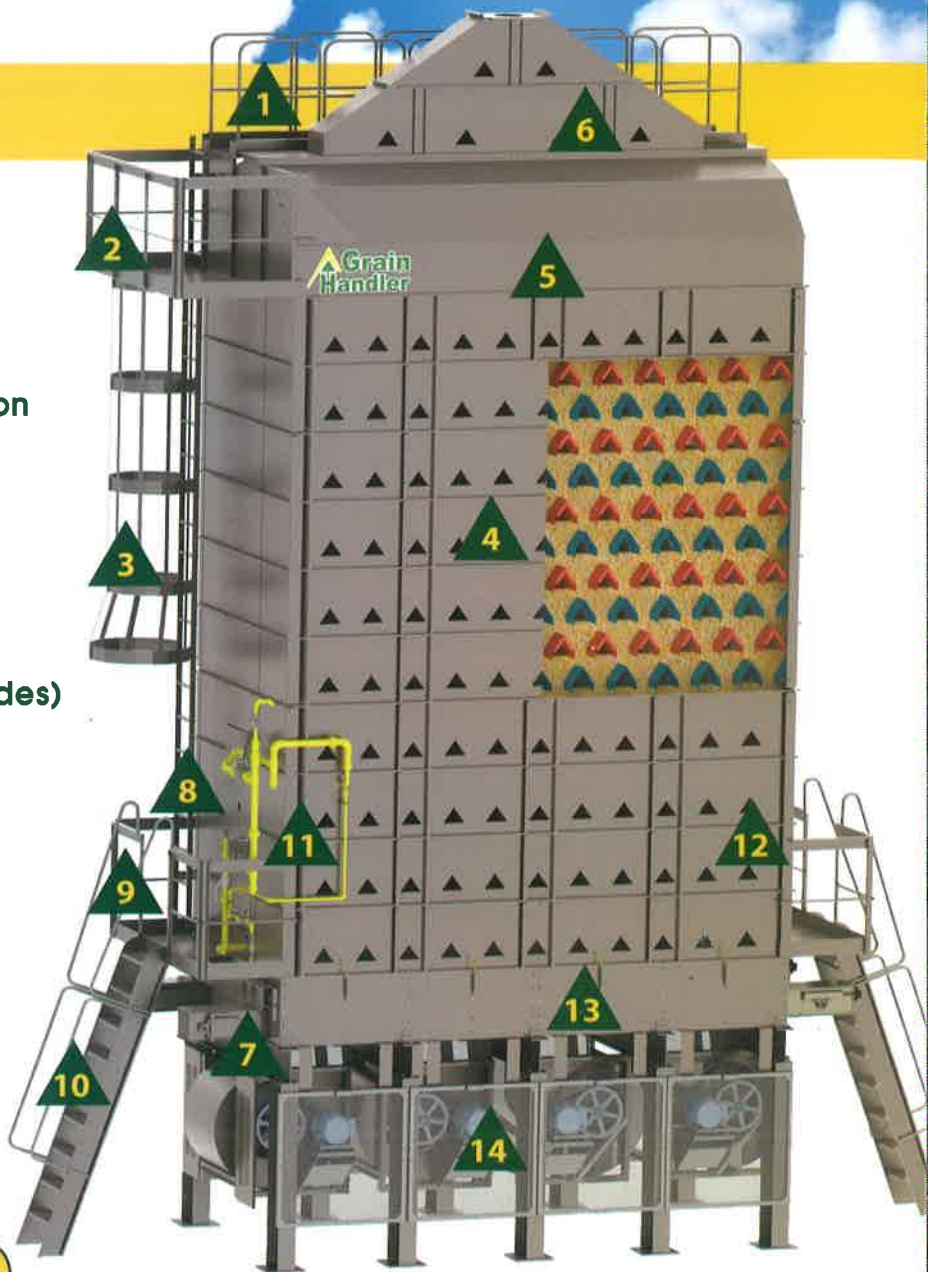


### REASONS FOR EFFICIENCY

**Larger Holding Capacity-** This allows grains to be tempered or heated up over a longer period of time, which reduces heat stress cracking, the mix flow drying process results in higher quality of grain and increased test weight.

**Retention Time-** Grain heated up over longer periods of time, allows tempering of grain, which requires less cfm per bushel. Grain Handler dryers use 45 cfm per bushel in comparison to cross flow screen dryers that use 80-120 cfm which will reduce the amount of energy used.

**Grain Flow-** When the grain is flowing and mixing throughout the dryer the grain is evenly exposed to the heat reducing the need for higher cfm levels and more effectively using the heated air generated compared to portable and tower screen dryers.

### MIXED FLOW DRYER AIR FLOW PATTERNS

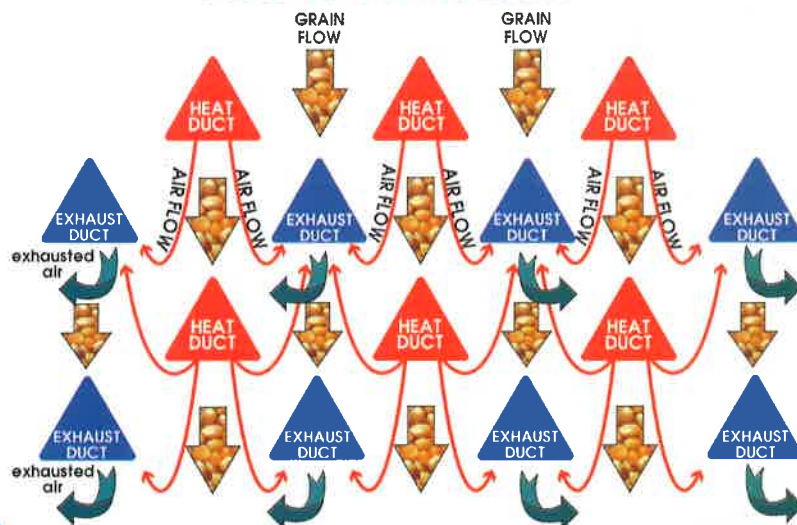


# FLEXIBILITY

## Fill and Unload Options

### FILL OPTIONS

**Leveling Fill Types:** Level Drag and Scalper Drag Conveyor available in all models, Leveling Auger available in 8' thru 24' models.

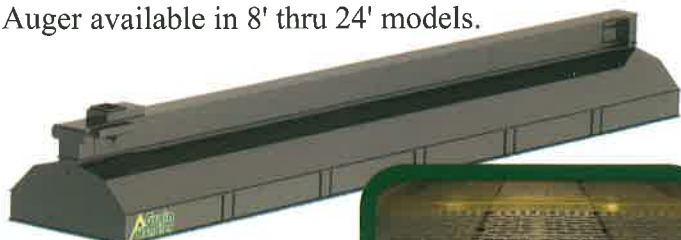

Scalper drag option: wire mesh floor for filtering unwanted debris.



**Gravity "A" Fill:** Available in 8' thru 32' models. No motor higher than 7 feet off the ground.



### UNLOAD OPTIONS

#### Cross Drag Conveyor

The cross drag conveyor will collect both grain columns and bring them to a single discharge point. 10 foot standard lengths, or custom lengths available.



#### 2-1 Y-Discharge

The 2-1 Y-discharge will collect both grain columns and bring them to a center point perfect for an air system or a bucket elevator boot.



### SINGLE DRIVE METERING AND DISCHARGE


A state of the art variable frequency drive now controls all 4 metering rolls and the unload drag conveyors. This keeps the drag conveyors running at the speeds required to remove the grain being metered out by the dryer, which in turn maintains the highest level of grain quality, synonymous with the Grain Handler name.



### CONTROL PANEL

Advanced single control panel for automated control of the motors, burner, and grain-flow throughout your entire system.

- Fully adaptable to after-market moisture controllers.
- Equipped with all necessary safety features.

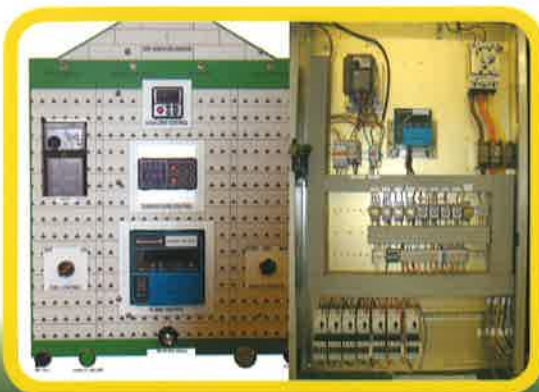

# SPECIFICATIONS

GH DRYER MODEL	BPH DRY & COOL 5 POINT	BPH DRY & COOL 10 POINT	TOTAL FAN UNDER FAN HP	FAN UNDER # OF FANS	BU TOTAL HOLDING	LEVELING AUGER FILL HEIGHT	LEVELING DRAG FILL HEIGHT	GRAVITY CONE FILL HEIGHT
808	456	296	10	2	588	28	30	30
810	542	353	15	2	700	32	34	34
812	629	409	15	2	812	36	38	38
816	803	522	20	2	1,036	44	46	46
820	976	635	30	2	1,260	52	54	54
822	1,063	691	30	2	1,372	56	58	58
824	1,150	748	40	2	1,484	60	62	62
826	1,237	804	40	2	1,596	64	66	66
1608	911	592	20	4	1,176	28	30	32
1610	1,085	705	30	4	1,400	32	34	36
1614	1,432	931	30	4	1,848	40	42	44
1616	1,606	1,044	40	4	2,072	44	46	48
1618	1,779	1,157	60	4	2,296	48	50	52
1620	1,953	1,269	60	4	2,520	52	54	56
1622	2,127	1,382	60	4	2,744	56	58	60
1624	2,300	1,495	80	4	2,968	60	62	64
1626	2,474	1,608	80	4	3,192	64	66	68
2408	1,367	889	30	6	1,764	28	30	34
2410	1,628	1,058	45	6	2,100	32	34	38
2412	1,888	1,227	45	6	2,436	36	38	42
2414	2,148	1,396	45	6	2,772	40	42	46
2416	2,409	1,566	60	6	3,108	44	46	50
2418	2,669	1,735	90	6	3,444	48	50	54
2420	2,929	1,904	90	6	3,780	52	54	58
2422	3,190	2,073	120	6	4,116	56	58	62
2424	3,450	2,243	120	6	4,452	60	62	66
2426	3,711	2,412	120	6	4,788	64	66	70
3210	2,172	1,412	60	8	2,803	N/A	34	40
3212	2,519	1,637	60	8	3,250	N/A	38	44
3214	2,866	1,863	80	8	3,699	N/A	42	48
3216	3,214	2,089	80	8	4,146	N/A	46	52
3218	3,561	2,314	120	8	4,594	N/A	50	56
3220	3,908	2,540	120	8	5,043	N/A	54	60
3222	4,255	2,766	160	8	5,490	N/A	58	64
3224	4,602	2,992	160	8	5,939	N/A	62	68
3226	4,950	3,217	160	8	6,386	N/A	66	72
4016	4,014	2,609	100	10	5,180	N/A	46	NA
4018	4,448	2,892	150	10	5,740	N/A	50	NA
4020	4,883	3,174	150	10	6,300	N/A	54	NA
4022	5,316	3,456	200	10	6,860	N/A	58	NA
4024	5,751	3,738	200	10	7,420	N/A	62	NA
4026	6,184	4,020	200	10	7,980	N/A	66	NA
4816	4,817	3,131	120	12	6,216	N/A	46	NA
4818	5,338	3,470	180	12	6,888	N/A	50	NA
4820	5,859	3,808	180	12	7,560	N/A	54	NA
4822	6,380	4,147	240	12	8,232	N/A	58	NA
4824	6,901	4,485	240	12	8,904	N/A	62	NA
4826	7,421	4,824	240	12	9,576	N/A	66	NA

All dryer width standard 8' 2". All Fan Under Dryers available in 8 to 26 tier sections. Capacities listed are wet bushels, shelled corn at listed moisture content and are estimates based on drying principles, field results, and computer simulations. Variance may occur due to grain's physiological factors (kernel size, test weight, chemical composition, variety, maturity, excessive fines, and adverse weather conditions.)

# GRAIN HANDLER USA



## THE BEGINNING

Grain Handler USA has been a leading manufacturer of grain handling equipment since 1986, with our primary product being the Continuous Mixed Flow grain dryer. In a short time frame Grain Handler USA has grown by leaps and bounds driven by customer service and with the idea that our product will be the best grain dryer money can buy. To understand a product fully, to us at Grain

Handler, it helps to understand the process of how our company started and what direction we are heading in.

The company started when two brothers, Gary and Michael Todd, purchased a Continuous Mixed Flow Dryer in 1979, for the family elevator. After drying for one season the brothers saw the quality and efficiency of this type of dryer compared to the more common cross flow dryers. In 1981, they started manufacturing parts and improving on the Mixed Flow design. This led to the two of them purchasing Grain Handler and moving it to Minnesota in 1986.

## PIONEERS OF THE FAN UNDER DRYER

In 1991 Gary and Michael saw an opportunity in the marketplace for larger capacity dryers, with the companies primary product line being a conventional or side fan continuous Mixed Flow grain dryer, which is limited to 2600 bph, the brothers got to work on a new concept of the Mixed Flow dryer. Thus the fan under was born! The drive that was used to create the fan under dryer is still alive today with Grain Handler continuously working on research and development at the Todd elevator in St. Charles, Minnesota.



**Grain Handler**  
Lakeville, MN Office  
21785 Hamburg Avenue  
Lakeville, MN 55044  
phone: 612-722-1085  
fax: 612-722-2642

Authorized Dealer

Comptoir Agricole Ste-Anne  
Tel: 450-582-0957  
1-888-891-0957  
Fax: 450-585-8957  
[www.comptoiragricole.com](http://www.comptoiragricole.com)



[www.grainhandler.com](http://www.grainhandler.com)

**Grain Handler**  
St. Charles, MN Office  
1012 St. Charles Avenue  
St. Charles, MN 55972  
phone: 507-932-5492  
fax: 612-722-2642